

MSUD valve form A 18mm with cable PUR-JZ 5x0,75 grey drag chain 1,5m

Form A (18 mm) for pressure switch
24 V DC with LED (yellow/green)

Image

Vicarious picture

Approvals**Form**

18141

Technical Data

| | |
|---------------------------------------|--|
| Operating voltage | 24 V DC $\pm 25\%$ |
| Operating current per contact (40 °C) | max. 4 A |
| Housing | Plastic, black (gray on request) |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Temperature range | -25...+85 °C, depending on cable quality |

Cable

| | |
|----------------------------|--------------------------|
| No./diameter of wires | 5 x 0.75 mm ² |
| Wire isolation | PP (bk, num, gnye) |
| C-track properties | 5 Mio. |
| Jacket | PUR (UL/CSA) |
| Outer diameter | approx. 7.0 mm |
| Bend radius (mobile) | 10 x outer diameter |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -25...+80 °C |

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/13

Commercial data

| | |
|-----------------------|----------|
| Net weight | 148 |
| Weight unit | gram |
| Basic unit | pc. |
| Customs tariff number | 85444290 |
| Unit (piece) | 1 |
| Limited value | 1 |


Comments

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

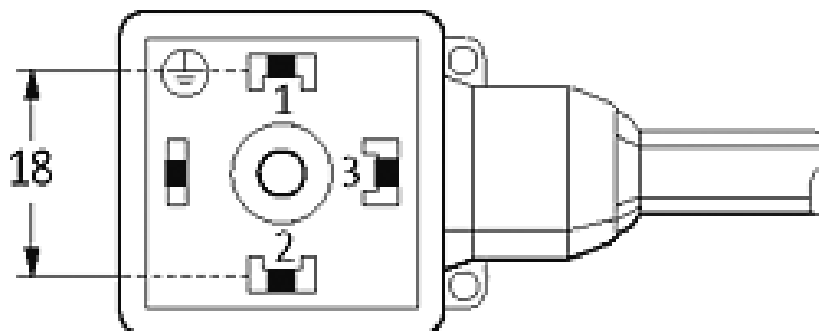

Circuit diagram

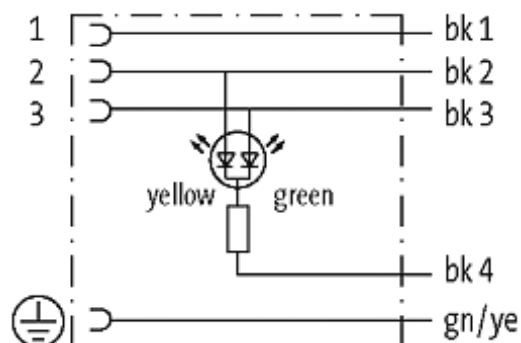

Dimension drawing

