

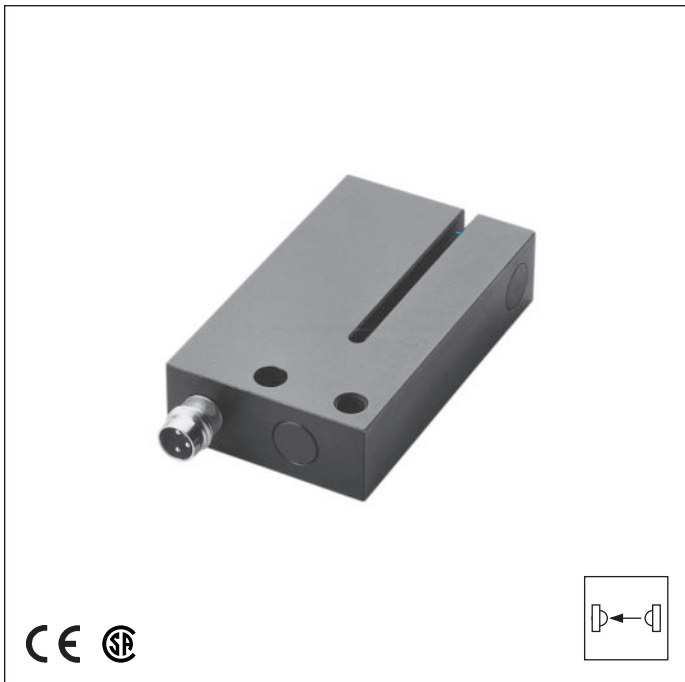


OGU 02 PN ...

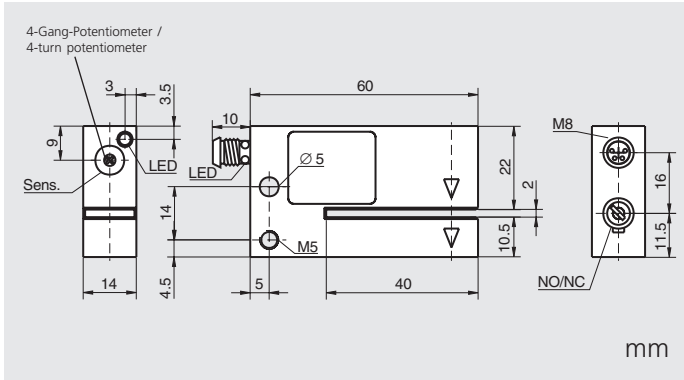

OGU 005 ...

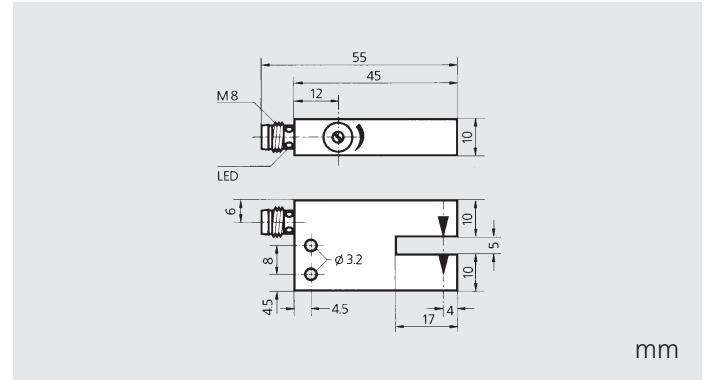

ungetaktet / non-clocked

2 mm
10 ... 35 V DC
pnp + npn
200 mA, kurzschlussfest / short-circuit-proof
≤ 30 mA
≤ 2,8 V
10 kHz
Ø 0,4 mm
≤ 0,1 mm
0,05 mm
-10 ... +60 °C
10 kLux
500 V
IP 67
Zinkdruckguss, schwarz lackiert / die-cast zinc, black lacquered finish

Typ / Model

—
—
—
—

OGU 02 PN3K-TSSL

—
—

TK .../4

getaktet / clocked

5 mm
10 ... 35 V DC
pnp *
200 mA, kurzschlussfest / short-circuit-proof
≤ 35 mA
≤ 2,5 V
1 kHz
Ø 0,5 mm
≤ 0,2 mm
0,01 mm
-10 ... +60 °C
20 kLux
500 V
IP 67
Alu, schwarz eloxiert / aluminium, black anodized

Typ / Model


OGU 005 P1K-TSSL
OGU 005 P2K-TSSL

—
—



TK ...

* bitte für npn-Ausgang ein pnp-Gerät mit npn-Umsetzer Typ TKHM-W-5/U bestellen /
please order for npn-output an pnp-instrument and a connecting cable with npn-converter model TKHM-W-5/U

OGU 010 ...

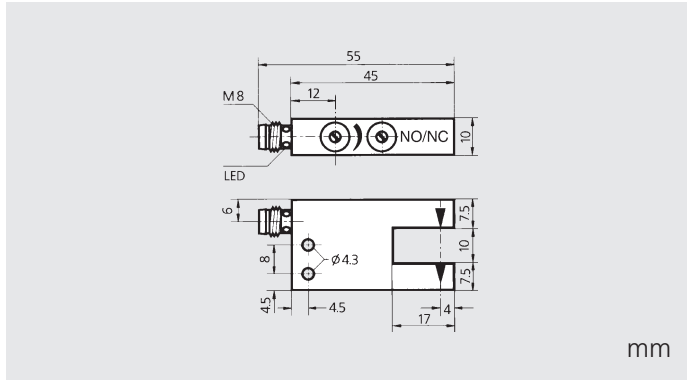

OGU 10 ...

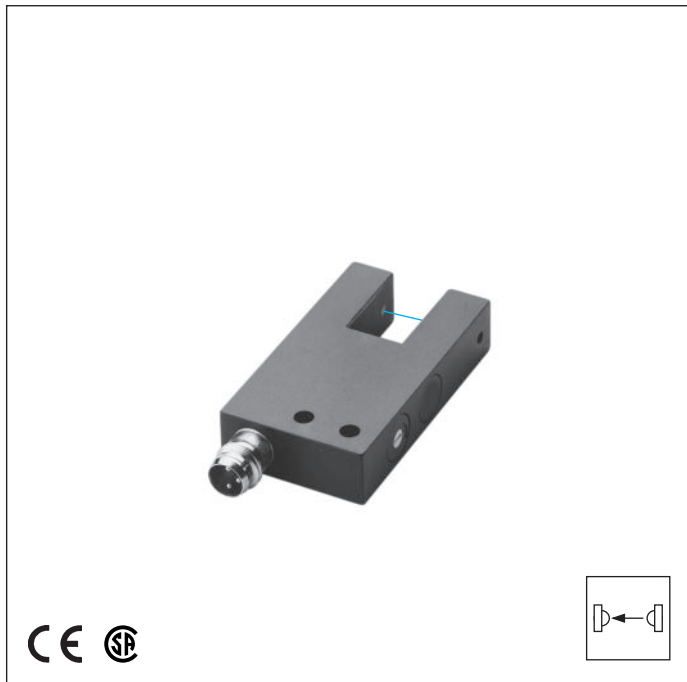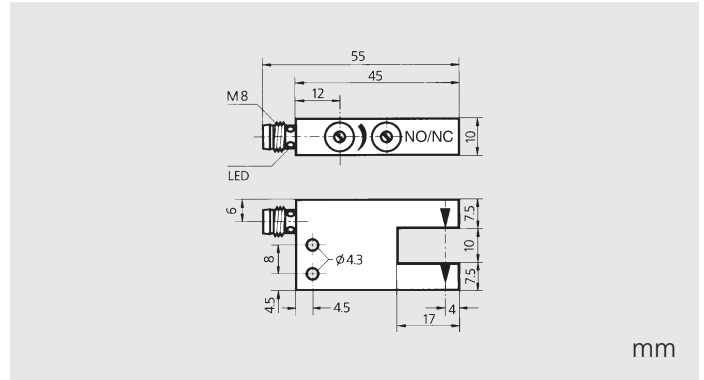

getaktet / clocked

10 mm
10 ... 35 V DC
pnp *
200 mA, kurzschlussfest / short-circuit-proof
≤ 30 mA
≤ 2,8 V
1 kHz
Ø 0,3 mm
≤ 0,1 mm
0,01 mm
-10 ... +60 °C
20 kLux
500 V
IP 67
Zinkdruckguss, schwarz lackiert / die-cast zinc, black lacquered finish

Typ / Model

—
—
OGU 010 P3K-TSSL

—
—
—
—

TK ...

ungetaktet / non-clocked

10 mm
10 ... 35 V DC
pnp / npn
200 mA, kurzschlussfest / short-circuit-proof
≤ 45 mA
≤ 2,5 V
10 kHz
Ø 0,5 mm
≤ 0,2 mm
0,01 mm
-10 ... +60 °C
1 kLux
500 V
IP 67
Zinkdruckguss, schwarz lackiert / die-cast zinc, black lacquered finish

Typ / Model

—
—
OGU 10 P3K-TSSL
OGU 10 N3K-TSSL

—
—
—
TK ...

* bitte für npn-Ausgang ein pnp-Gerät mit npn-Umsetzer Typ TKHM-W-5/U bestellen /
please order for npn-output an pnp-instrument and a connecting cable with npn-converter model TKHM-W-5/U