

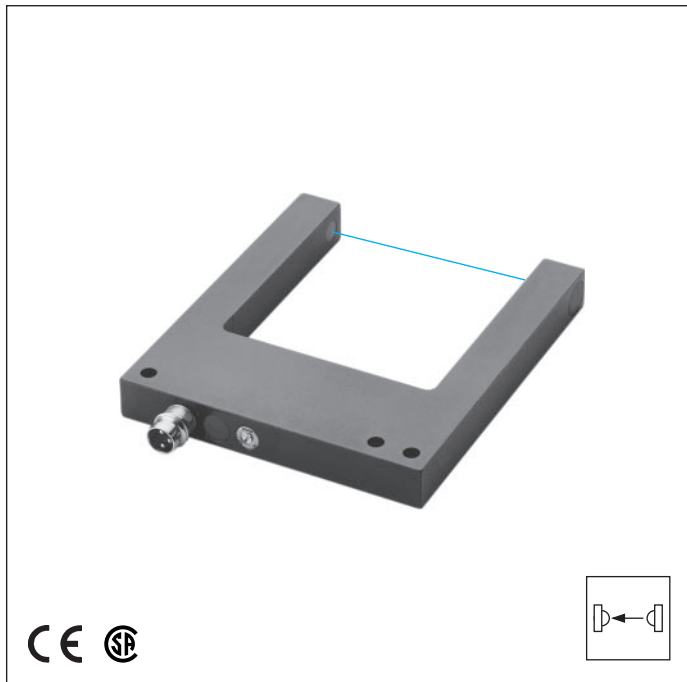
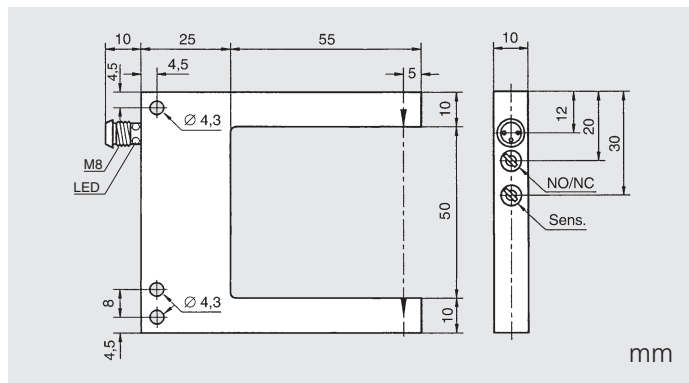


OGUH 050 ...

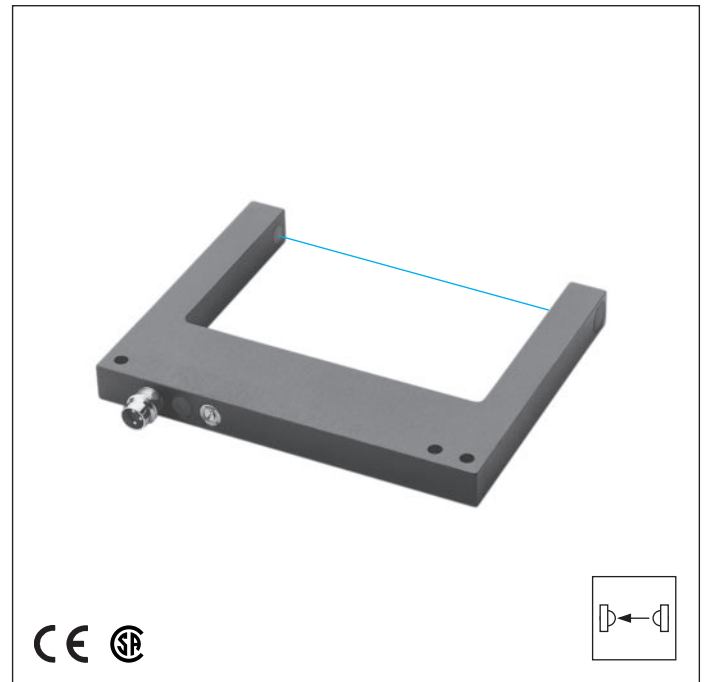

OGUH 080 ...

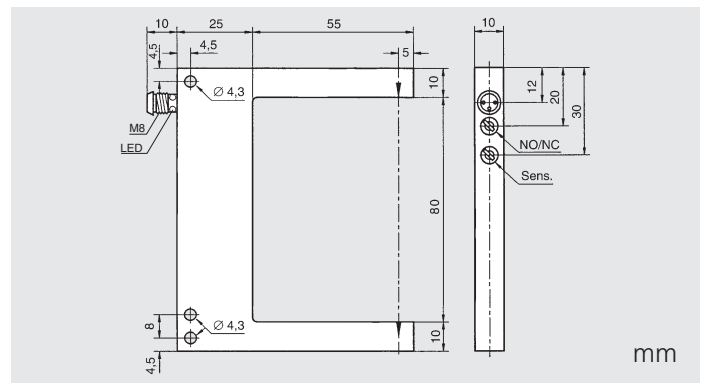

getaktet / clocked

50 mm
10 ... 35 V DC
pn ⁺ *
200 mA, kurzschlussfest / short-circuit-proof
≤ 20 mA
≤ 2,8 V
4 kHz
Ø 0,25 mm
≤ 0,25 mm
0,04 mm
-10 ... +60 °C
20 kLux
500 V
IP 67
Zinkdruckguss, schwarz lackiert / die-cast zinc, black lacquered finish

Typ / Model

OGUH 050 P3K-TSSL

getaktet / clocked

80 mm
10 ... 35 V DC
pn ⁺ *
200 mA, kurzschlussfest / short-circuit-proof
≤ 20 mA
≤ 2,8 V
4 kHz
Ø 0,25 mm
≤ 0,25 mm
0,06 mm
-10 ... +60 °C
20 kLux
500 V
IP 67
Zinkdruckguss, schwarz lackiert / die-cast zinc, black lacquered finish

Typ / Model

OGUH 080 P3K-TSSL

—

—

—

TK ...