


BES 516-3025-G-E4-C-PU-05
BES00LE

NPN
NC
flush mountable

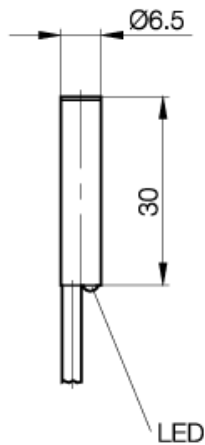

PX2023

Electrical data:

Connection	Cable
Electrical type	DC
Switching output	NPN
Switching element function	NC
Rated operational voltage (U _e)	24 DC V
Load current capacity (I _e)	200 mA
Utilization category	DC 13
Hysteresis max (H)	15 %
Ripple max. of U _e	= 15 %
Off-state current max (I _r)	20 µA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Time delay before availability	20 ms
No-load supply current damped	3 mA
No-load supply current undamped	11 mA
Operating frequency (f)	1500 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Number of wires	3-wire
Assured operating distance	0...1,6 mm
Mounting	flush mountable
Sensing face material	PBT
Housing material	corrosion resistance Steel
Cable code designation	LIFY-11Y-O
Repeat accuracy max. (R)	5 %
Ambient temperature min	-25 °C
Degree of pollution	3
Rated operating distance (sn)	2 mm
Diameter	6,5 mm
Ambient temperature max	+70 °C

General data:

Degree of protection IP	IP68 per BWN Pr 20
Output indication	yes
Insulation class	2
Protected against polarity reversal	yes
Approval	CE,c_ul_us
Short circuit protected	yes

Wiring:

