


BES 516-324-G-EO-C-PU-03
BES01AP

PNP
NO
flush mountable

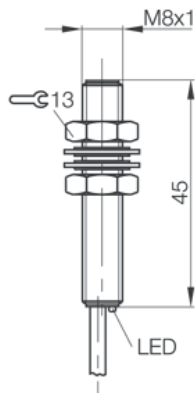

PX2010

Electrical data:

Connection	Cable
Electrical type	DC
No-load supply current damped	9 mA
No-load supply current undamped	3 mA
Operating frequency (f)	1500 Hz
Voltage drop max. static	2,5 V
Time delay before availability	20 ms
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NO
Off-state current max (I _r)	20 µA
Ripple max. of Ue	= 15 %
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V

Mechanical data:

Rated operating distance (s _n)	2 mm
Repeat accuracy max. (R)	5 %
Number of wires	3-wire
Cable code designation	LIFY-11Y-O, 3x0,14mm ²
Ambient temperature max	+70 °C
Diameter	M8x1 mm
Assured operating distance	0...1,6 mm
Mounting	flush mountable
Sensing face material	PA 12
Housing material	corrosion resistance Steel
Ambient temperature min	-25 °C
Degree of pollution	3

General data:

Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Short circuit protected	yes
Approval	CE,c_ul_us
Degree of protection IP	IP68 per BWN Pr 20

Wiring:

