


BES 516-359-BO-C-PU-03
BES01HJ

NPN
NO
flush mountable

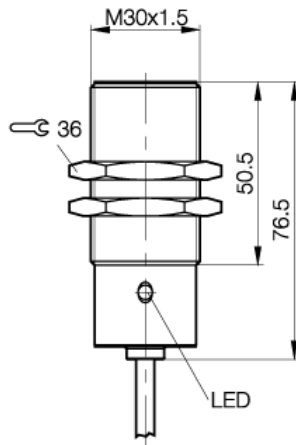

PX0023

Electrical data:

Connection	Cable
Electrical type	DC
Off-state current max (I _r)	80 µA
Ripple max. of U _e	= 15 %
Operating frequency (f)	300 Hz
Voltage drop max. static	2,5 V
Time delay before availability	100 ms
No-load supply current damped	= 25 mA
Hysteresis max (H)	15 %
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Rated operational voltage (U _e)	24 DC V
Load current capacity (I _e)	200 mA
Utilization category	DC 13
Switching output	NPN
Switching element function	NO

Mechanical data:

Rated operating distance (s _n)	10 mm
Diameter	M30x1.5 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Degree of pollution	3
Mounting	flush mountable
Repeat accuracy max. (R)	5 %
Sensing face material	PA 12
Housing material	CuZn, nickel plated
Number of wires	3-wire
Assured operating distance	0...8,1 mm
Cable code designation	LifY-Y-11Y-O

General data:

Approval	CE,c_ul_us
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Short circuit protected	yes

Wiring:

