


BES 516-375-BO-C-02
BES01L7

NPN
NC
flush mountable

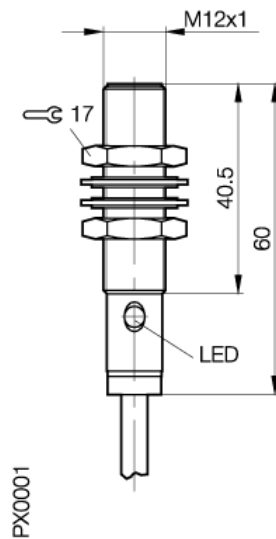

Electrical data:

Time delay before availability	30 ms
No-load supply current damped	= 1 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	1,5 V
Hysteresis max (H)	15 %
No-load supply current undamped	10 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Switching output	NPN
Switching element function	NC
Connection	Cable
Electrical type	DC
Off-state current max (Ir)	10 µA
Ripple max. of Ue	= 15 %

Mechanical data:

Rated operating distance (sn)	2 mm
Diameter	M12x1 mm
Ambient temperature max	+85 °C
Ambient temperature min	-40 °C
Degree of pollution	3
Sensing face material	PA 12
Number of wires	3-wire
Assured operating distance	0...1,6 mm
Cable code designation	LIYY-0
Mounting	flush mountable
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %

General data:

Insulation class	2
Degree of protection IP	IP68 per BWN Pr 20
Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Approval	CE,c_ul_us

Wiring:

