


BES M12MI-PSC40B-S04G
BES0068

PNP
NO
flush mountable

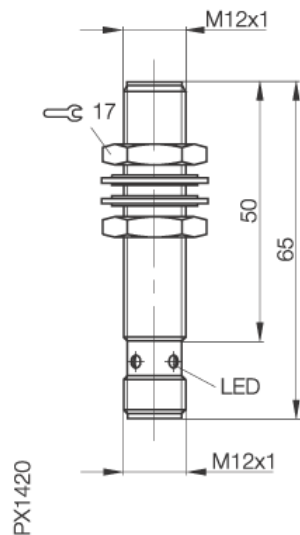

Electrical data:

Load current capacity (I _e)	200 mA
Utilization category	DC 13
No-load supply current undamped	15 mA
Switching element function	NO
Supply voltage min. (U _b)	12 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 15 mA
Off-state current max (I _r)	20 µA
Ripple max. of U _e	= 15 %
Operating frequency (f)	300 Hz
Voltage drop max. static	2,5 V
Supply voltage max. (U _b)	30 V
Rated operational voltage (U _e)	24 DC V
Time delay before availability	10 ms
Hysteresis max (H)	15 %
Switching output	PNP

Mechanical data:

Number of Wires	3-wire
Diameter	M12x1 mm
Assured operating distance	0...3,2 mm
Repeat accuracy max. (R)	5 %
Degree of pollution	3
Sensing face material	LCP
Housing material	CuZn, nickel plated
Rated operating distance (sn)	4 mm
Mounting	flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C

General data:

Short circuit protected	yes
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Brand	GlobalProx
Approval	CE,ULZ1

Wiring:



Pinout:

