


Basic series
4 mm not embeddable

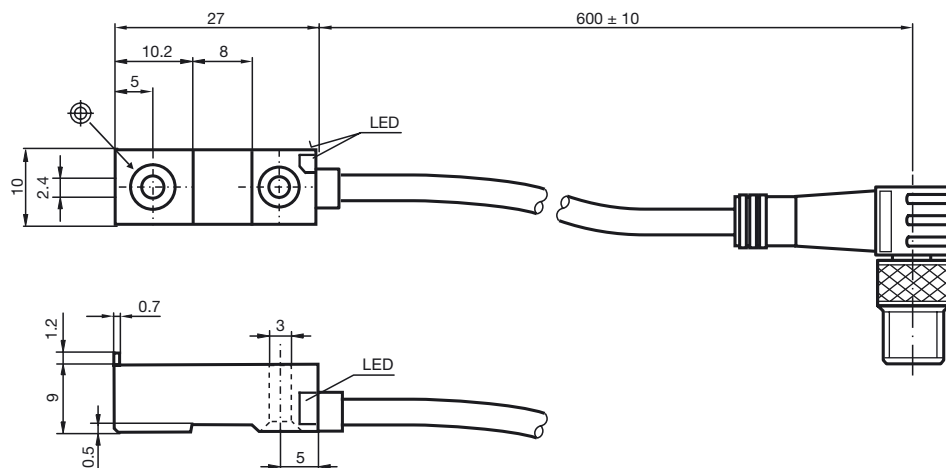

General specifications	
Switching element function	PNP Make function
Rated operating distance s_n	4 mm
Installation	not embeddable
Output polarity	DC
Assured operating distance s_a	0 ... 3.24 mm
Reduction factor r_{AI}	0.4
Reduction factor r_{CU}	0.3
Reduction factor r_{V2A}	0.7
Nominal ratings	
Operating voltage U_B	10 ... 30 V
Switching frequency f	0 ... 1000 Hz
Reverse polarity protection	protected against reverse polarity
Short-circuit protection	pulsing
Voltage drop U_d	≤ 3 V
Operating current I_L	0 ... 100 mA
Off-state current I_r	0 ... 0.5 mA typ. 0.1 μ A at 25 °C
No-load supply current I_0	≤ 10 mA
Indication of the switching state	LED, yellow
Standard conformity	
Standards	IEC / EN 60947-5-2:2004
Ambient conditions	
Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Mechanical specifications	
Connection type	0.6 m, PUR cable with V3 device connector ESCHA
Core cross-section	0.14 mm ²
Housing material	PPS
Sensing face	PPS
Protection degree	IP67

Connection type:

E2

