


# OLE Q15 V 2000 P3K-TSSL


## Laser Through Beam Sensor

- Collimated red light laser, clocked
- Small design
- High resolution, switching accuracy, switching frequency
- Robust metal casing

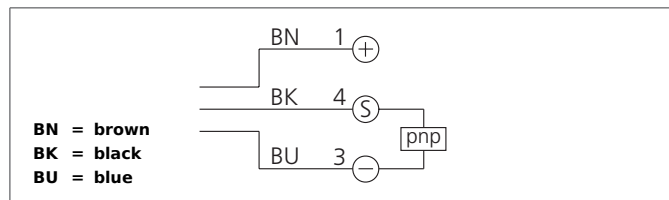

### Safety instructions

Inproper use may result in hazardous radiation exposure. Pay attention to accident prevention rules and laser class. The instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments. These instruments shall exclusively be used by qualified personnel. Repair only by di-soric.

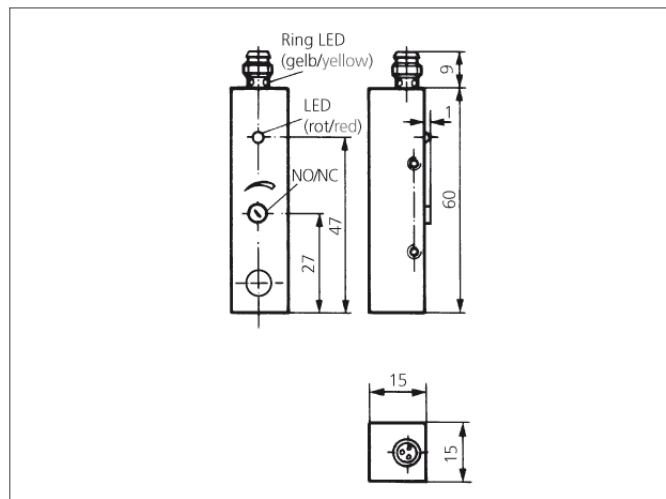

TECHNICAL INFORMATION	+20°C, 24V DC
Size	15 x 15 x 60 mm (Dimensions)
Design	cuboid design
Emitted light	Red light laser, 650 nm, clocked
Operating distance	0 ... 2.000 mm
Service voltage	15 ... 28 V DC
Transmitter / receiver	receiver
Output	pnp, 200 mA, NO/NC, switchable
Internal power consumption	< 24 mA
Voltage drop	< 2,0 V
Operating frequency	1.200 Hz
Resolution	Ø 0,3 mm
Switching hysteresis	< 0,1 mm
Ambient temperature	+5 ... +45 °C
Ambient light immunity	> 20 kLx
Insulation voltage endurance	500 V
Protection class	IP 67
Casing material	brass nickel plated
Connection	Connector, M8, 3-poled