


OGLP 120 N3K-TSSL **High Performance Angled Light Barrier**


- High functional reserve
- Collimator optics
- Optical axis approachable in x-, y- and z-direction
- Integrated electronic module
- Sensitivity adjustable
- Light/dark switching
- Metal connector
- Bright ring LED
- 3-years function guarantee* *according to our General Conditions of Export

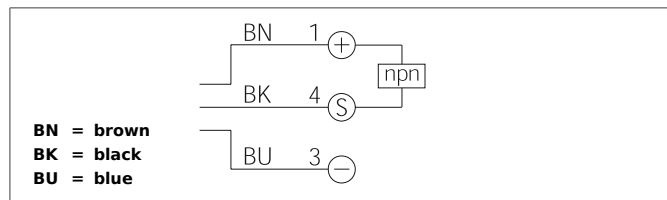

Safety instructions

The Instruments are not to be used for safety applications, in particular applications in which safety of persons depends on proper operation of the instruments.

These instruments shall exclusively be used by qualified personnel.
Repair only by di-soric.

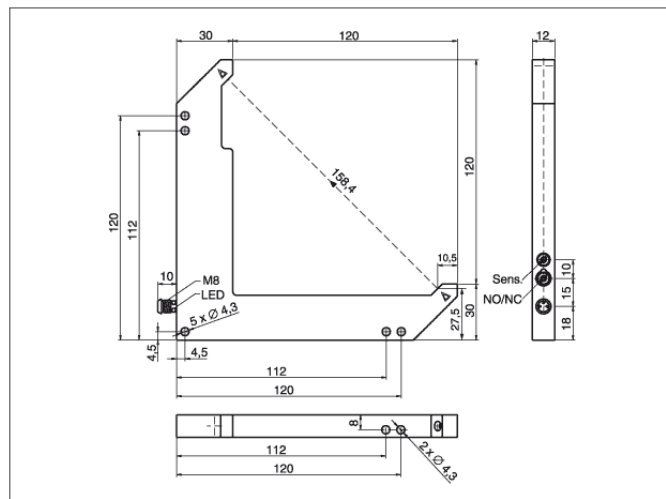

TECHNICAL INFORMATION	
Design	Angle
Branch length	120 mm
Emitted light	Infrared, 880 nm, clocked
Service voltage	10 ... 35 V DC
Transmitter / receiver	transmitter + receiver
Output	nnp, 200 mA, NO/NC, switchable
Sensitivity adjustment	potentiometer
Internal power consumption	< 40 mA
Operating frequency	2.000 Hz
Resolution	Ø 3 mm
Switching hysteresis	< 0,25 mm
Reproducibility	0,06 mm
Ambient temperature	-10 ... +60 °C
Ambient light immunity	> 50 kLx
Insulation voltage endurance	500 V
Protection class	IP 67
Casing material	die-cast zinc black lacquered finish
Connection	Connector, M8, 3-poled
Signal input	< 2,8 V