

## Accessories - programming aids

### UB-PROG2




Programming device

- For ultrasonic sensors series

UB300			
UB400	-12GM	-E4	-V15
UB500	-18GM40	-E5	
UB1000	-18GM75	-I	
UB2000	-30GM	-U	
UB4000	-F54		
UB6000			

... whose teach-in input is on pin 2.

- Simple TEACH-IN of the switching distances A1/A2 or the measuring window.
- Simple selection of the output function:  
Window mode, normally open/normally closed function.  
One switching distance, normally open/normally closed function.  
Monitoring of the detection range.

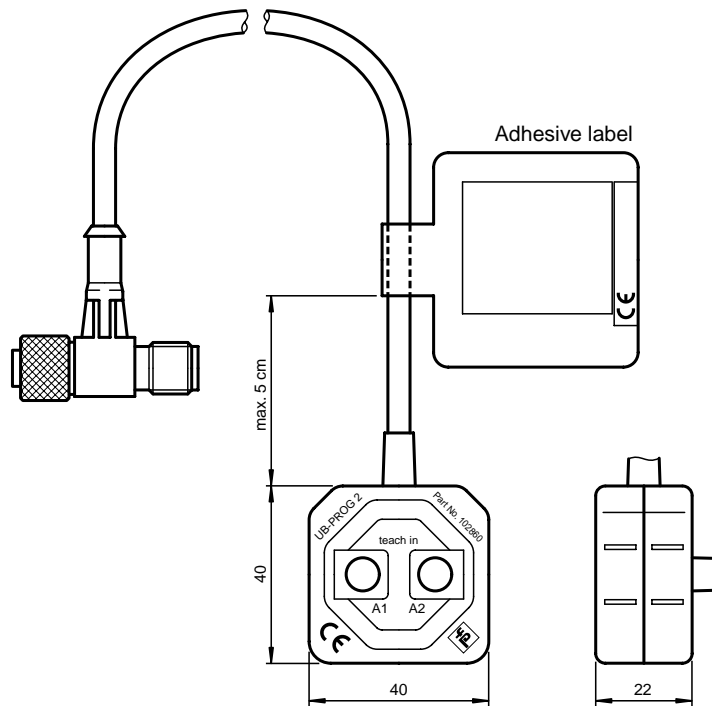

The unit can be switched from the V15 cable connection socket and the V15 plug connection on the sensor for the TEACH-IN procedure.  
The switching distances/measuring window and output function can be taught in using the A1 and A2 buttons.  
The taught-in switching distances and functions are retained when the programming unit is removed and/or the power is switched off.

### UB-PROG3




Programming device

- For ultrasonic sensors series

UB500		-E01	-V15
UB1000	-18GM75	-E23	
		-E6	
		-E7	

... whose teach-in input is on pin 5.

- Simple TEACH-IN of the switching distances A1/A2 or the measuring window.
- Simple selection of the output function:  
Window mode, normally open/normally closed function.  
One switching distance, normally open/normally closed function.  
Monitoring of the detection range.

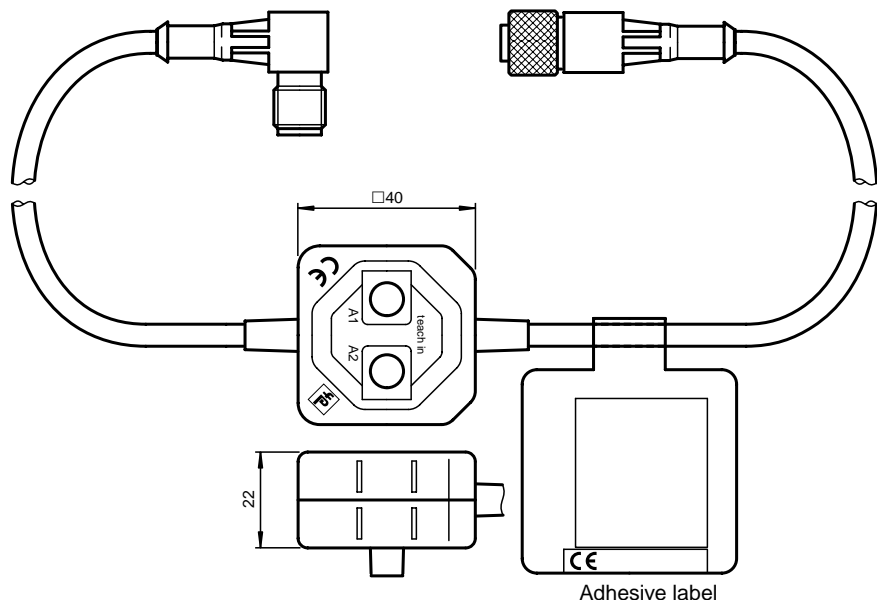

The unit can be switched from the V15 cable connection socket and the V15 plug connection on the sensor for the TEACH-IN procedure.  
The switching distances/measuring window and output function can be taught in using the A1 and A2 buttons.  
The taught-in switching distances and functions are retained when the programming unit is removed and/or the power is switched off.