




Dimensions

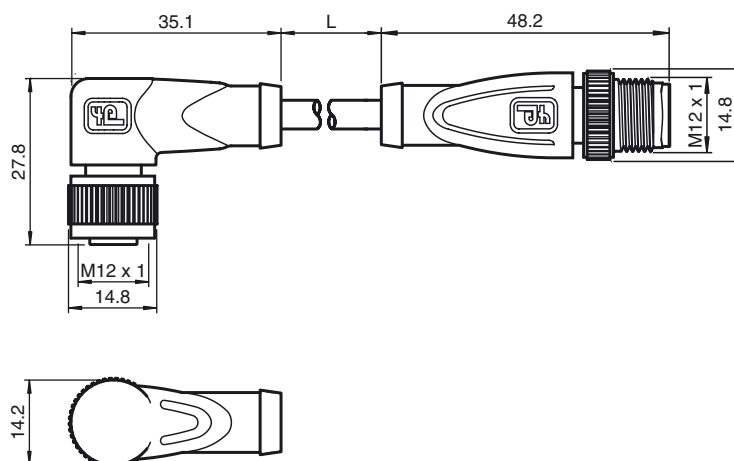

Model number

V1-W-1,0M-PUR H/S-V1-G

Connecting cable, M12, 4-pin, PUR cable crosslinked by irradiation

Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Protection degree IP67 / IP68 / IP69K
- Halogen-free
- Flexible sheathing
- Suitable for 2-, 3- and 4-wire technology

Technical data

General specifications

Number of poles	4
Connection 1	Connector, female
Construction type 1	angled
Threading 1	M12
Connection 2	Connector, male
Construction type 2	straight
Threading 2	M12
UL File Number	E231213

Electrical specifications

Operating voltage	max. 300 V DC
Test voltage	> 1500 V _{eff} AC
Operating current	max. 4 A
Volume resistance	< 5 mΩ


Ambient conditions

Ambient temperature	-20 ... 105 °C (253 ... 378 K) active -50 ... 105 °C (223 ... 378 K) static
Degree of soiling	3

Mechanical specifications

Contact elements	spring-loaded contact socket
pin diameter	1 mm
Protection degree	IP67 / IP68 / IP69K
Material	
Contacts	CuSn / Au
Contact surface	Au
Handle	TPU, green
Cable	PUR
Slotted nut	diecast zinc
(Cap??-translator) connector	diecast zinc
Core isolation	TPE
Cable	fine-strand, flexible
Covering (Sheathing)	irradiated
Sheath diameter	Ø4.8 mm
Bend radius	> 40 mm
Colour	orange
Cores	4 x 0.34 mm ²
Conductor construction	19 x 0.15 mm Ø
Length	L 1 m
Flammability	
Contact material	94V-2
Housing	94V-2

Electrical connection 1



Electrical connection 2

